


INVENTRONICS

EUC-030SxxxDVM000x

Rev. A

- THD 10%
-
- 0-10V
- : 4kV 6kV
-
- Class I
-
- &
- IP67
-
-

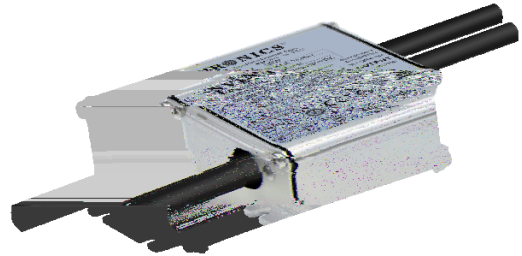

EUC-030SxxxDVM000x

30W IP67

90-305Vac

					120Vac	220Vac	

- 1 120-240Vac 127-250Vdc CCC KS
- 2 220 Vac
- 3 SELV

INVENTRONICS

EUC-030SxxxDVM000x

Rev. A

				100% 120Vac
				100% 220Vac
(I ² t)				220Vac 25°C 10%Ipk-10%Ipk = 32.8μs
				100-240Vac 50-60Hz 65%-100% (19.5-30W)
				200-240Vac 50-60Hz 65%-100% (19.5-30W)

				100%
				100%
				100%
			±	100%
			±	220Vac
		°		°

Cree XLamp XP-G2 220Vac 25°C

				100% 25

INVENTRONICS

EUC-030SxxxDVM000x

Rev. A



INVENTRONICS

EUC-030SxxxDVM000x



Rev. A

EMI	
EMS	

1 EMI

() EMI


寿命 vs. 壳温

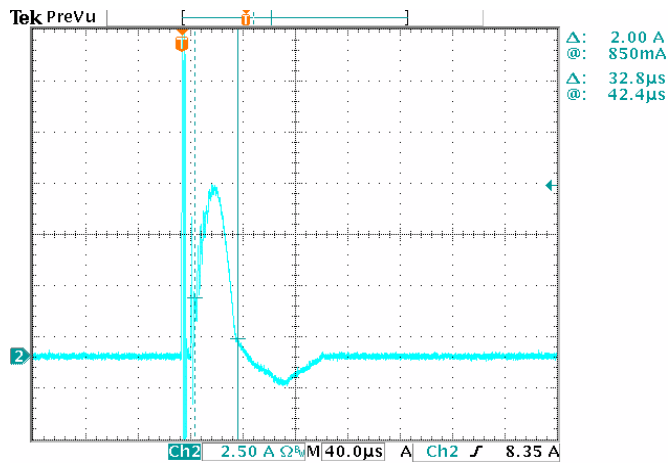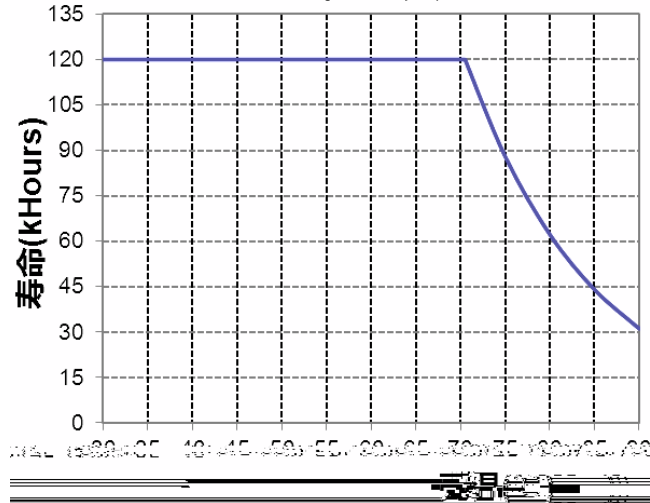


EUC-030S035DVM

EUC-030S050DVM

效率 vs. 输出电压

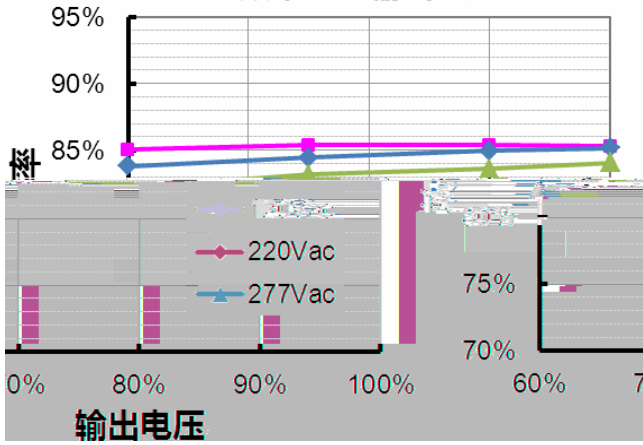


效率 vs. 输出电压

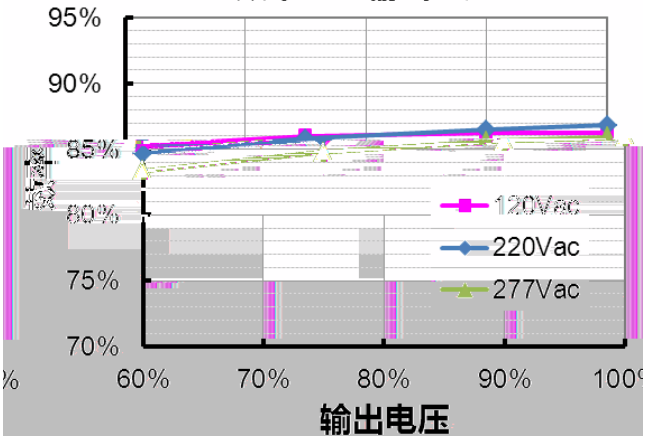



EUC-030S070DVM

效率 vs. 输出电压

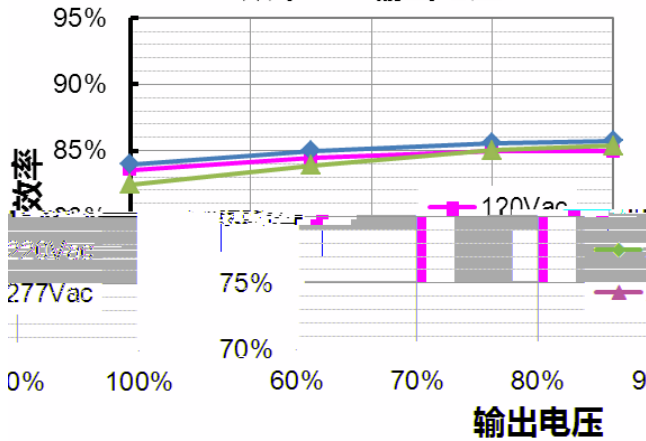


功率因数 vs. 负载

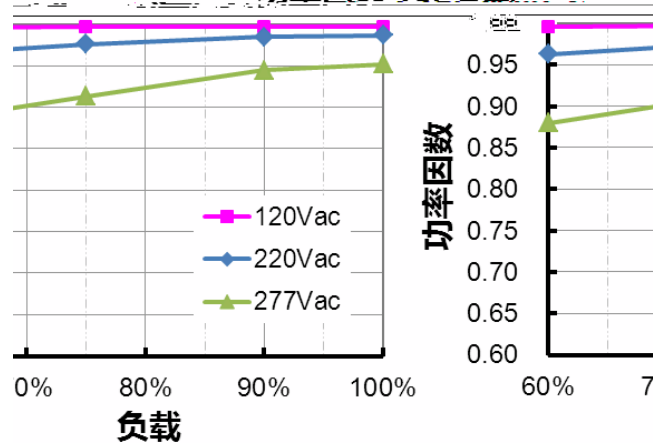


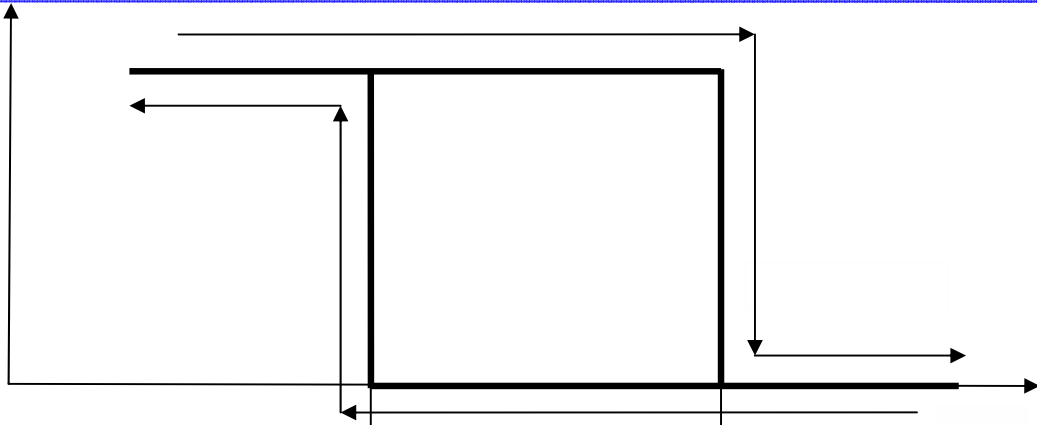

●

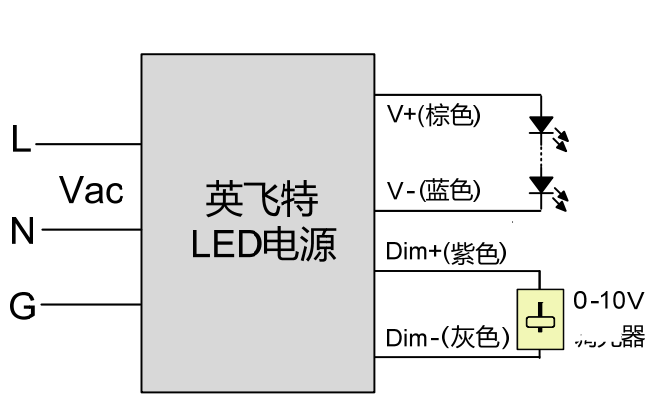

Io/Iomax vs. 调光电压

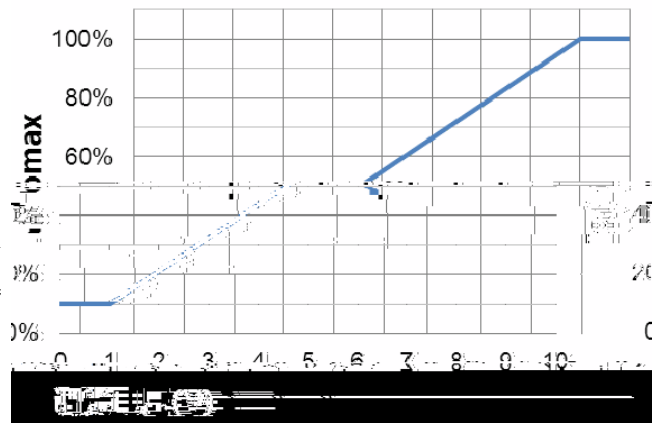

1. 0-10V
2. Dim- V- V+
3. Dim+

INVENTRONICS

EUC-030SxxxDVM000x

Rev. A

			/	/