

-
-
-
-
-
-
-
-
-
-



LUG-025S105DTE

25W IP20

90-305Vac

10%

1 25W

2 UL FCC

100-277Vac

127-250Vdc

UL, FCC


100-240Vac

127-250Vdc KS

3 220Vac 100%

" "

4 Class 2 & SELV

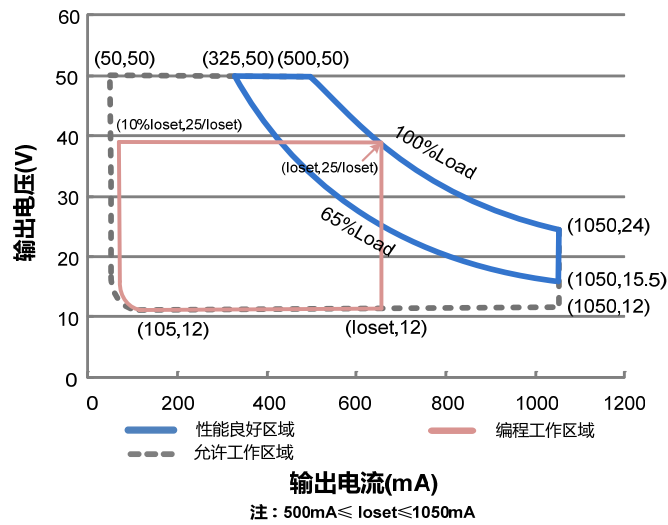

				100% 100Vac
				100% 220Vac
I ² t				220Vac 25 10%I _{pk} -10%I _{pk} = μs

				100%

(

				100%
				100%
				100%
			±	100%
			±	
				120Vac 65% ~ 100%
				220Vac 65% ~ 100%
		°		= 0° ~ Tc


25°C


				100% 25°
				100% 25°
				100% 25°
				220Vac 25 80% (MIL-HDBK-217F)
				120Vac 80% 75
			°	
			°	5 10% RH to 90% RH
				5% RH to 95% RH

1 EMI


() EMI

寿命 vs. 壳温

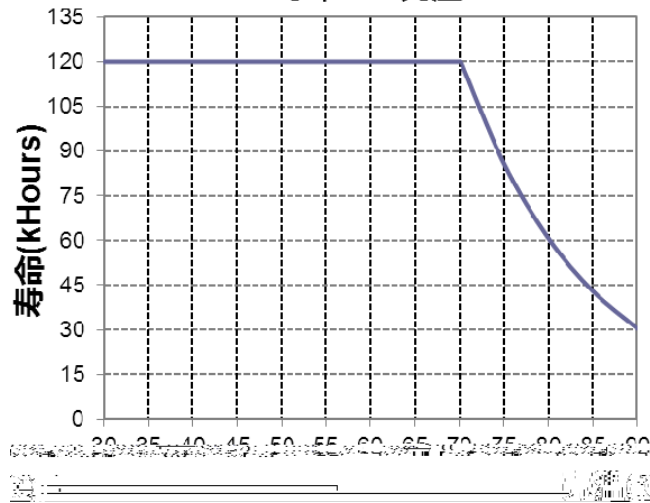


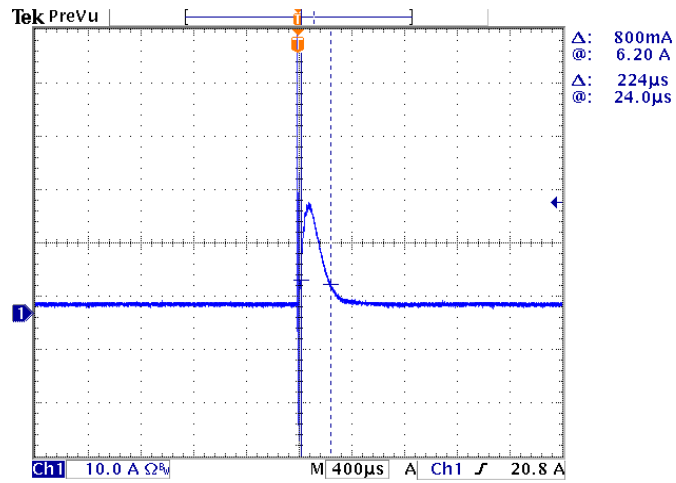


LUG-025S105DTE($I_o=500mA$)
效率 vs. 输出电压

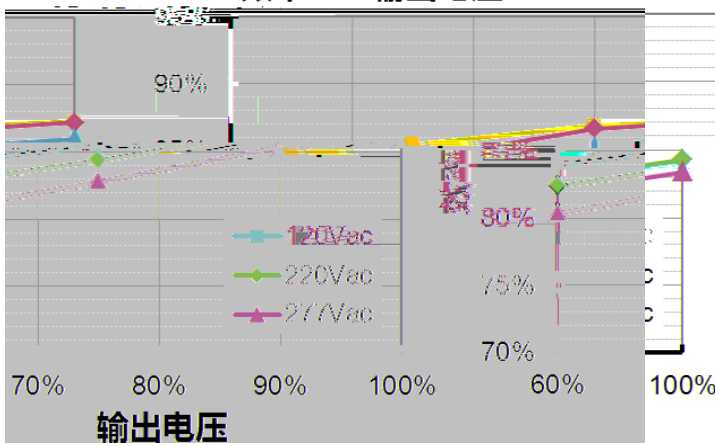




LUG-025S105DTE($I_o=1050mA$)

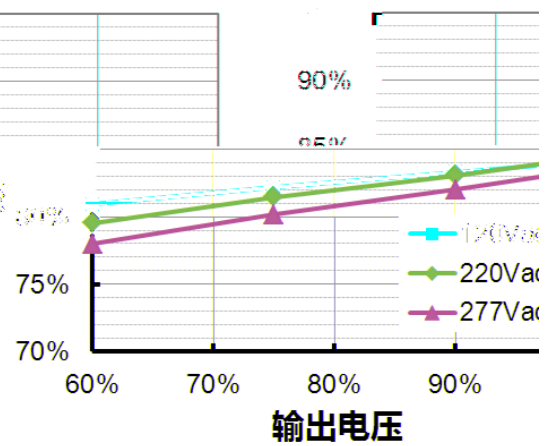

功率因数 vs. 负载

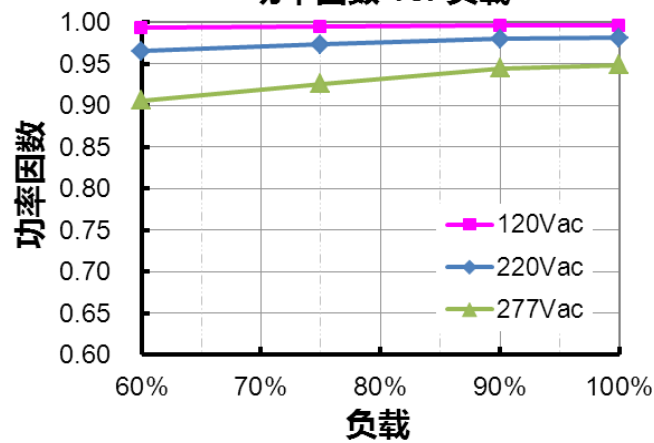


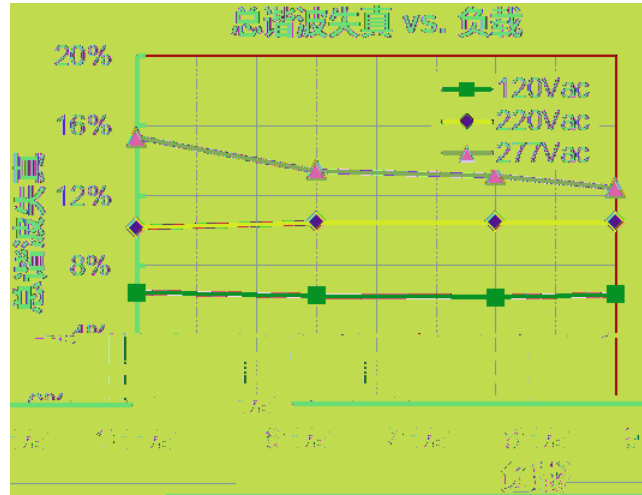


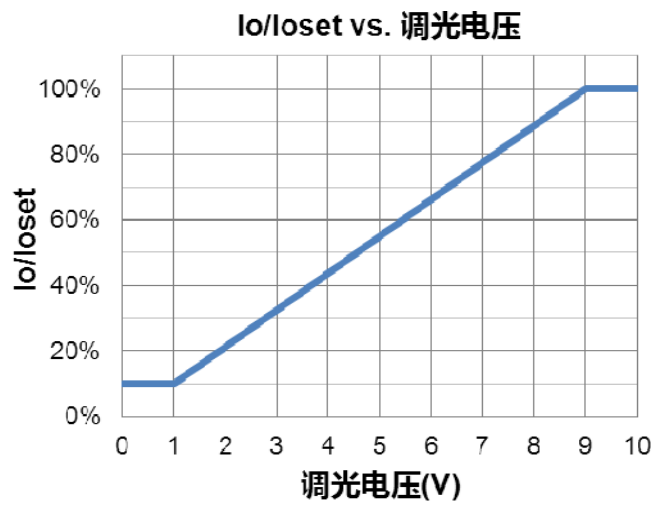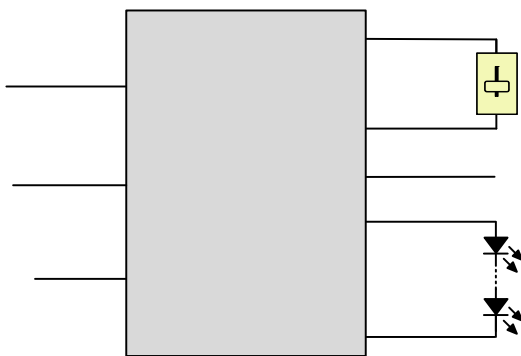

1 DC

0-10V

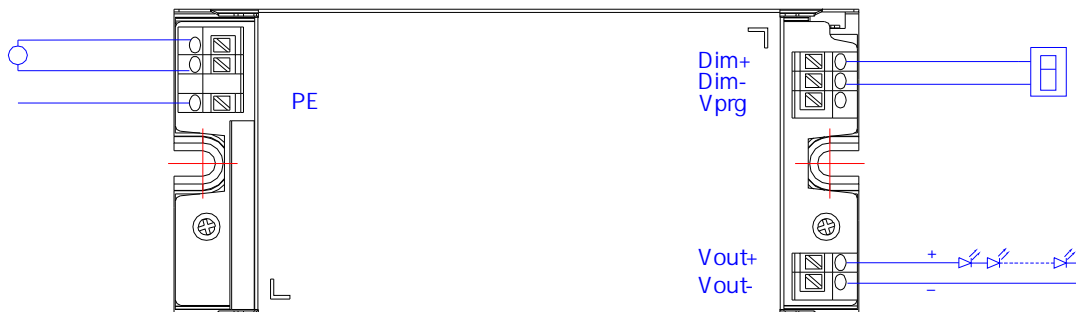

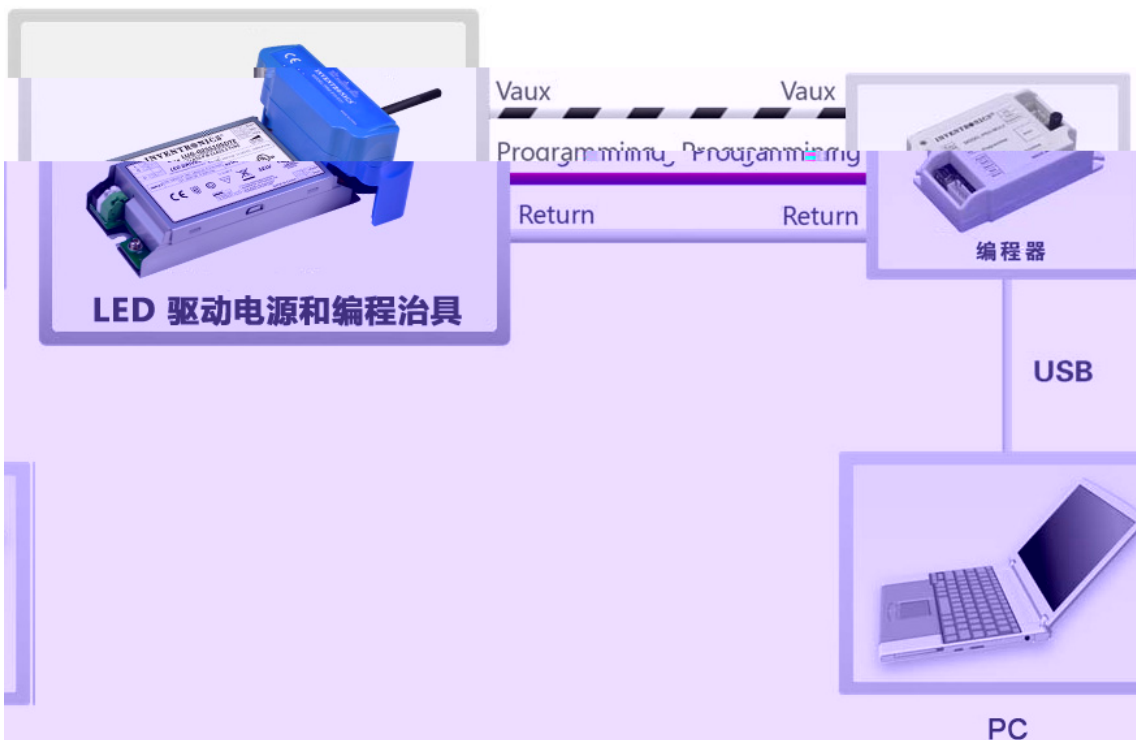

			/	
		-		
