

91%
50~ 100%
DALI

1 W
4kV, 6kV

IP67 UL
Class 2 SELV
Class I, Division 2



EUD-096SxxxBT


96W

90-305Vac

	(1)	(2)	(3)			
				120Vac	220Vac	


- 1 96W
- 2 UL, FCC 100-277Vac 127-300Vdc; 100-240Vac 127-250Vdc.
- 3 220Vac 50% 100%
- 4 SELV
- 5 Class 2 & SELV

I-V

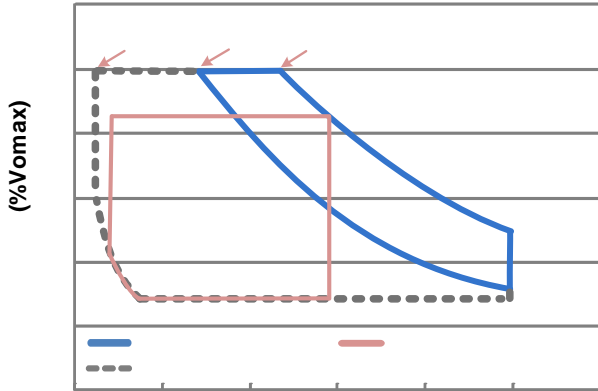

(%Iomax)

: $50\%I_{omax} \leq I_{oSet} \leq 100\%I_{omax}$
 $P_{omax} = 50\% \cdot I_{omax} \cdot V_{omax}$

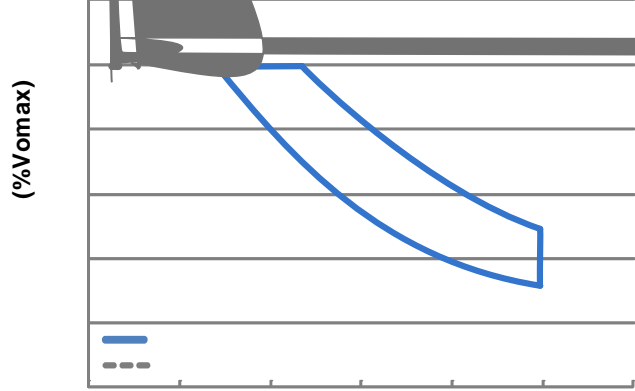






(%Iomax)


	-		-	220Vac, 25, 80% (MIL-HDBK-217F)
				220Vac 80% 60
(L x W x H) (L x W x H)				

DA1,DA2				
DA1,DA2				
DA1,DA2				
				≤ ≤
				≤ <

EMI	

EMI	
EMS	
DALI	
DALI	IEC62386-101,102 & 207 ⁽³⁾

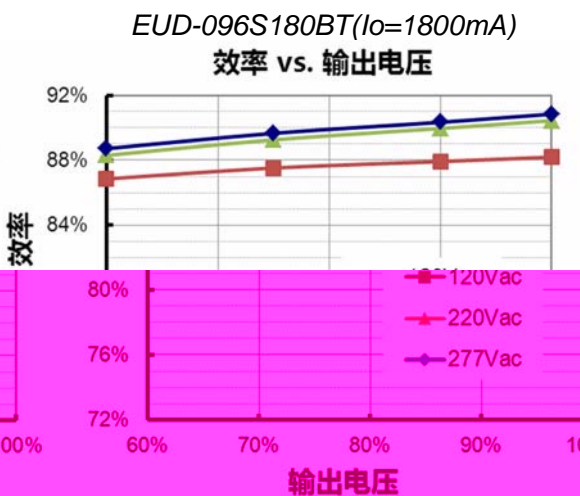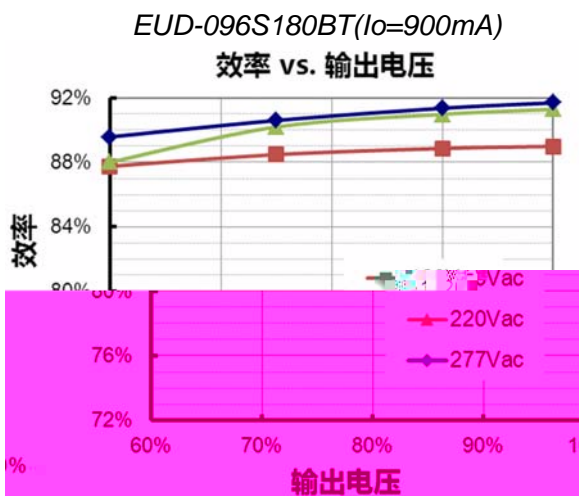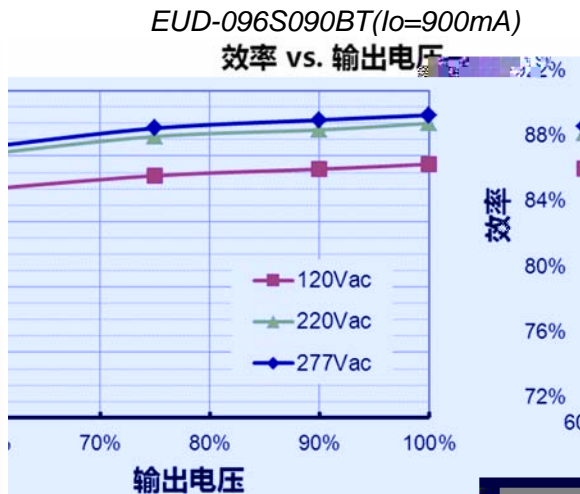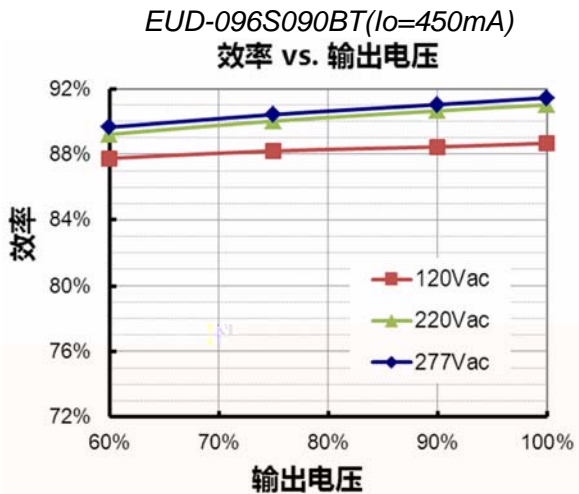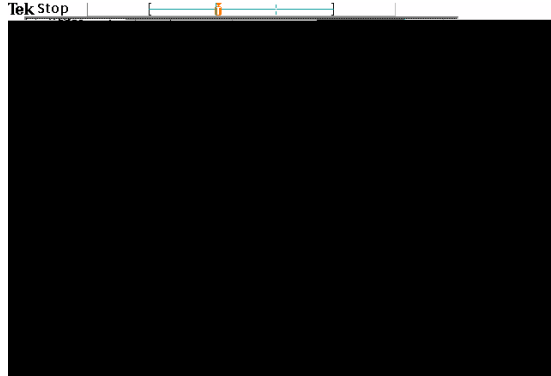

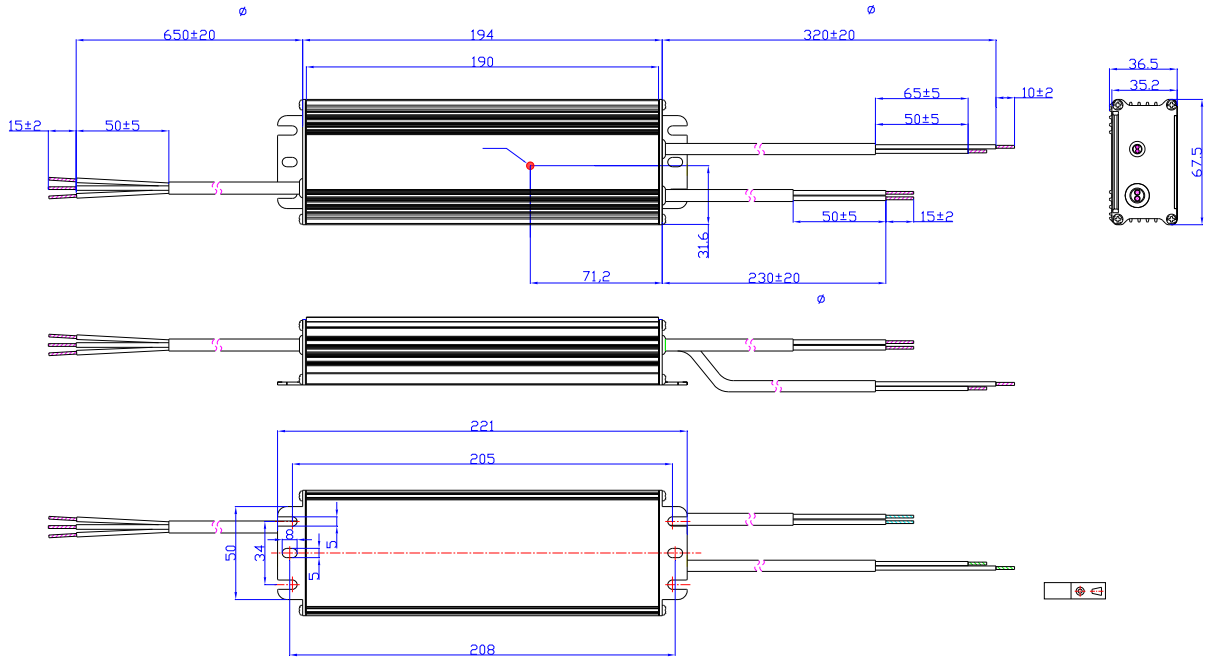

RoHS

RoHS 2011/65/EU

EU 2015/863

2014-08-30	A		/	/	
2015-3-30	B		/		
				pk-pk	pk-
		200Hz	pk-pk	/	
				/	
				/	
				/	
				/	
2015-09-16	C	KS, DALI	/		
			/		
			DALI		
2016-04-13	D				
			/		
2019-08-23	E				
		/	50-60Hz		
			UL/CUL		
			KS		
			FCC		
			EN 61000-4-5		
			/		
RoHS	/				
